


YUGO 2

Code: GM0622

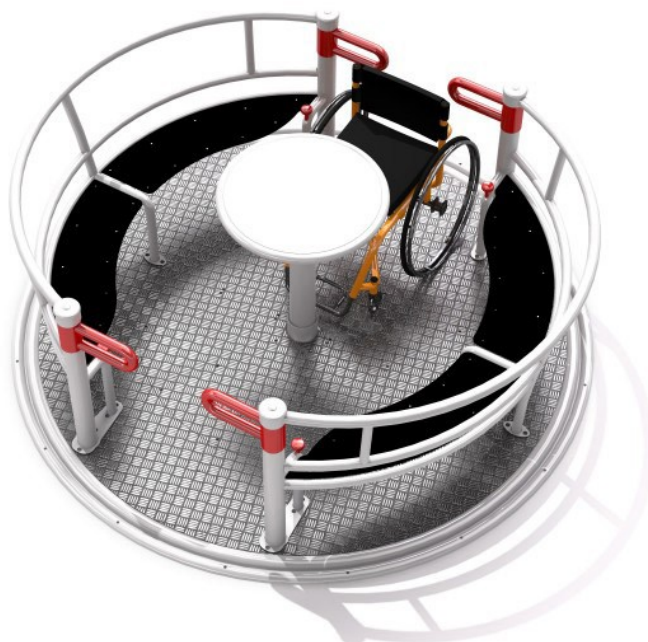

Description

The carousel enables simultaneous use by two people in wheelchairs and four people sitting on benches. The carousel is equipped with the three-stage **Safety System INTEGRADO**.

1 - Entrance gates in the open position block the rotation of the carousel. Rotation is possible only after closing all gates.

2 - Opening the gate while the carousel is turning causes the carousel to stop immediately.

3 - Centrifugal brake prevents the carousel from rotating too quickly. Wheelchair roundabout made of galvanized steel, designed for disabled people.

Each person inside roundabout can move or stop it using a round circle in the middle of the roundabout. Playground device has two gates.

A special protection system is mounted inside carousel to provide the most secure way to use the product. The carousel won't start with open gates. It is possible to move the carousel once the gates are closed. It is possible to open gates by the person stay inside, by using one of the red handles which are located next to gates.

Inside roundabout is mounted centrifugal brake system which protected that device is not moving too fast. Color of construction is grey, color of seats in black, color of gates is red.

Wheelchair roundabout is made of galvanized steel and powder painted.

Playground device consists of

- 1x rotating platform
- 1x middle circle which moving the roundabout
- 2x double seats with the backrests
- 2x places for wheelchair users
- 2x gates
- 1x integrated mechanism systems inside device: centrifugal brake system, drum braking system, gate lock system and locking system for carousel rotation in the case of non-closed gates.

Product details

- Dimensions: 2,2 x 2,2 x 0,79m
- Safety area: 6,20 x 6,20m
- Free fall height: 0,79m
- Certificate confirming compatibility with norm EN 1176

Materials

Construction made of galvanized steel and powder painted with pipes 60,30 x 2,90 mm, 101,30 x 7,10 mm and profile 50,00 x 40,00 x 3,00 mm and metal plate 6,00 mm. Platform made of aluminium plate 3,00 mm. The seats made of PE plate 10,00 mm. Carousel bearing: ball and thrust bearing system.

All images are for illustration purpose only and may vary from the actual product.

